


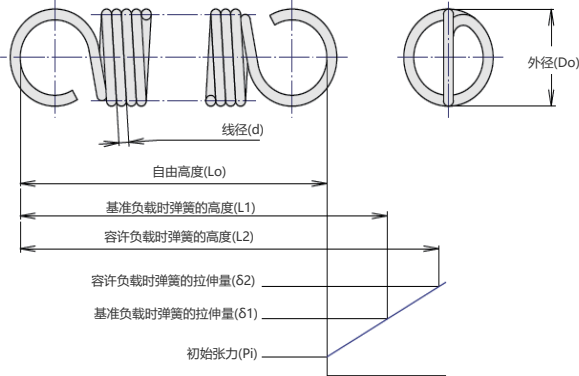

Type	材质
T-AWY	SWP-A
T-BWY	
T-AUY	SUS304-WPB
T-BUY	

自由高度 Lo	Do=18未満	±1.0
	Do=18以上	±1.5

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWY	2-10	0.25	5.7	1.86	0.34	0.27
T-AUY	15		10.3			0.15
	20		14			0.11
	25		18.2			0.08
	30		22.1			0.07
T-AWY	3-10	0.3	8.7	2.25	0.29	0.23
T-BWY	15		16.6			0.12
T-AUY	20		25			0.08
T-BUY	25		33.3			0.06
	30		40			0.05
T-AWY	4-15	0.4	10	3.24	0.59	0.26
T-BWY	20		16.8			0.16
T-AUY	25		22.5			0.12
T-BUY	30		28.4			0.09
	35		33.7			0.08
	40	0.5	38.5	4.22	0.88	0.07
T-AWY	5-15		6.8			0.49
T-BWY	20		11.7			0.28
T-AUY	25		17			0.2
T-BUY	30		21.2			0.16
	35	0.6	26.1	8.14	1.27	0.13
	40		34			0.1
	45		37.7			0.09
	50		42.5			0.08
T-AWY	6-20		14			0.49
T-BWY	25	0.8	21.2	12.75	2.35	0.32
T-AUY	30		28			0.25
T-BUY	35		35			0.2
	40		41.1			0.17
	45		50			0.14
	50	1	53.8	15	3.73	0.13
	55		63.6			0.11
	60		70			0.1
T-AWY	8-25		15.1			0.69
T-BWY	30		21.2			0.49
T-AUY	35	1.2	26.5	31.37	5.39	0.39
T-BUY	40		33.1			0.31
	45		39.2			0.26
	50		46			0.23
	55		48.1			0.22
	60	1	53	15	3.73	0.2
	65		58.8			0.18
	70		66.2			0.16
T-AWY	10-30		11.5			0.98
T-BWY	35		15.3			0.74
T-AUY	40	1.2	19.8	31.37	5.39	0.57
T-BUY	45		23.9			0.47
	50		28.7			0.39
	55		32.8			0.34
	60		37			0.3
	65	1	39.6	15	3.73	0.29
	70		44.2			0.26
	75		47.9			0.24
	80		52.2			0.22
	* 90		60.5			0.19
	* 100	1.2	71.8	31.37	5.39	0.16
T-AWY	12-35		22			1.18
T-BWY	40		27.8			0.93
T-AUY	45		35.3			0.74
T-BUY	50		42			0.62
	55	1.2	50			0.52
	60		55.2			0.47
	65		63			0.41
	70		69.7			0.37
	75		77.9			0.33
	80	1.2	82.8	31.37	5.39	0.31
	90		91.3			0.29
	100		106			0.25

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWY	14-40	1.5	15.4	38.24	8.43	1.94
T-AUY	45		21			1.42
	50		25.4			1.17
	55		30.8			0.97
	60		37			0.8
	65		43.2			0.69
	70		46.2			0.64
	75		52.8			0.56
	80		58.3			0.51
	90		68.1			0.43
	100		76.4			0.39
	125		91			0.33
T-AWY	16-45	1.6	15.8	43.15	9.12	2.16
T-AUY	50	(T-AWY)	21			1.62
	55		25.7			1.32
	60	1.7	31.5			1.08
	65	(T-AUY)	35.8			0.95
	70		40.8			0.83
	75		46.3			0.74
	80		49.6			0.69
	90		60.9			0.56
	100		69.4			0.49
	125		91.3			0.37
	150		115.6			0.29
T-AWY	18-50	1.8	21	52.96	9.81	2.05
	55		26			1.66
	60		31			1.39
	65		36			1.2
	70		42			1.03
	75		46			0.94
	80		54			0.8
	90		66			0.65
	100		75			0.58
	125		104.5			0.41
	150		132			0.33
	175		167.5			0.39
T-AWY	20-60	2	29.1	78.45	12.75	2.26
	70		41.8			1.57
	80		53.6			1.23
	90		67			0.98
	100		78.8			0.83
	125		111.6			0.59
	150		139.5			0.47
	175		167.5			0.39

※ 初始张力・弹簧常数为参考值。负载(kgf)=负载N×0.101972
* 仅限T-AWY・T-AUY型号