


■ 中轻载型 T-AWU / T-BWU / T-AUU / T-BUU

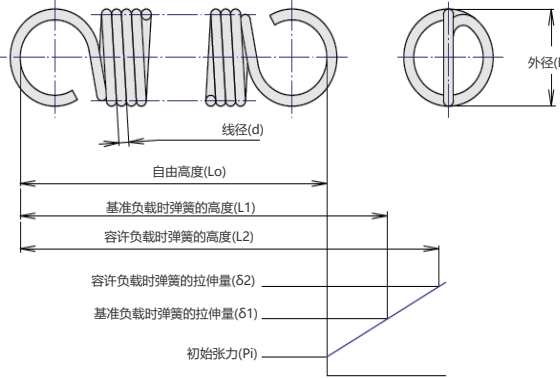

Type	材质
T-AWU	SWP-A
T-BWU	
T-AUU	SUS304-WPB
T-BUU	

自由高度 Lo	Do=18未満	±1.0
	Do=18以上	±1.5

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWU	2-10	0.28	4	2.45	0.49	0.49
T-AUU	15		6.7			0.29
	20		10			0.2
	25		13.3			0.15
			4.6			0.59
T-AWU	3-10	0.35	9.1	3.33	0.66	0.29
T-BWU	15		14.3			0.19
T-AUU	20		19.5			0.14
T-BUU	25		24.8			0.11
	30		7.5			0.51
T-AWU	4-15	0.45	12.2	4.81	0.98	0.31
T-BWU	20		16.9			0.23
T-AUU	25		21.7			0.18
T-BUU	30		26			0.15
	35		30			0.13
	40	0.55	5.7	6.37	1.37	0.89
T-AWU	5-15		9.8			0.51
T-BWU	20		14.2			0.35
T-AUU	25		18.9			0.26
T-BUU	30		24.3			0.21
	35	0.7	28.3	12.94	1.67	0.18
	40		31.9			0.16
	45		36.4			0.14
	50		9.6			1.18
			14.4			0.78
T-AWU	6-20	0.9	20.2	18.63	3.92	0.56
T-BWU	25		28.8			0.39
T-AUU	30		30.3			0.37
T-BUU	35		34.8			0.32
	40		41.1			0.27
	45	1.1	44.2	23.24	4.71	0.25
	50		50			0.23
	55		10			1.47
	60		14.3			1.03
	65		18.8			0.78
T-AWU	8-25	1.4	23.8	47.7	10.49	0.62
T-BWU	30		28.3			0.52
T-AUU	35		32.6			0.45
T-BUU	40		37.5			0.39
	45		41.7			0.35
	50	1.7	46.9	55.4		0.31
	55		50			0.29
	60		9.9			1.87
	65		14			1.32
	70		18			1.03
T-AWU	10-30	2.0	22.2			0.83
T-BWU	35		26.3			0.71
T-AUU	40		31.5			0.59
T-BUU	45		35.7			0.52
	50		38.6			0.48
	55	2.3	43			0.43
	60		47.3			0.39
	65		51			0.36
	70		59			0.31
	75		67.5			0.27
T-AWU	12-35	2.6	11.7			3.14
T-BWU	40		15.5			2.35
T-AUU	45		19.6			1.86
T-BUU	50		23.3			1.57
	55		28.7			1.27
	60	2.9	32.4			1.13
	65		37.3			0.98
	70		41.4			0.88
	75		44.9			0.81
	80		49.7			0.74
	90	3.2	57.4			0.64
	100		65.4			0.56

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWU	14-40	1.6	12.8	58.84	13.73	3.53
T-AUU	45		16.7			2.7
	50		21			2.16
	55		25.5			1.77
	60		28.7			1.57
	65		32.8			1.37
	70		38.3			1.18
	75		41.8			1.08
	80		46			0.98
	90		54.1			0.83
	100	1.8 (T-AWU)	61.3	70.61	16.67	0.74
	125		83.6			0.54
T-AWU	16-45		13.7			3.92
T-AUU	50		17.7			3.04
	55		22			2.45
	60	1.9 (T-AUU)	26			2.06
	65		30.5			1.77
	70		34.3			1.57
	75		39.2			1.37
	80		42.3			1.27
	90	2	50	81.39	17.65	1.08
	100		57.8			0.93
	125		78.7			0.69
	150		100			0.54
	175		19.1	98.07	22.56	3.34
	18-55	2.3	23.2			2.75
	60		27			2.36
	65		30.9			2.06
	70		36.1			1.77
	75	2.6	40.6			1.57
	80		48.1			1.33
	90		56.5			1.13
	100		76.4			0.83
	125		100			0.64
	150	2.9	16			4.72
	175		22.6			3.34
	20-60		28.5			2.65
	70		36.6			2.06
	80		42.7			1.77
	90	3.2	59.2			1.28
	100		77			0.98
	125		90.5			0.83
	150					
	175					

※ 初始张力・弹簧常数为参考值。负载(kgf)=负载N×0.101972
* 仅限T-AWU・T-AUU型号