


■ 中载型 T-AWS / T-BWS / T-AUS / T-BUSS

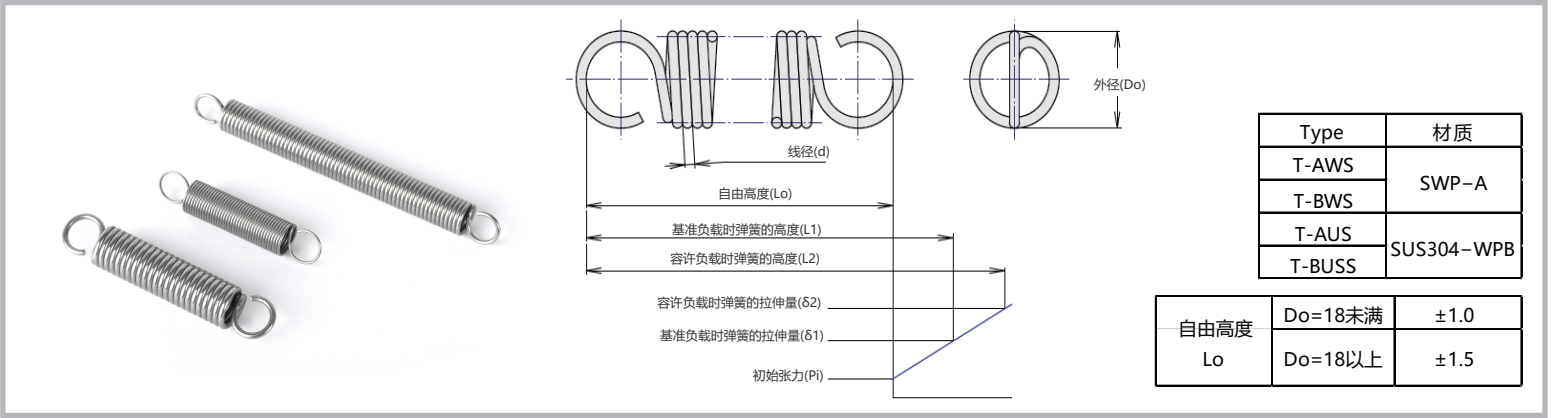

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWS	2-10	0.3	3.8	3.53	0.69	0.75
T-AUS	15		6.7			0.42
	20		9.6			0.3
	25		12.6			0.23
T-AWS	3-10	0.4	3.5	4.41	0.88	0.98
T-BWS	15		6			0.59
T-AUS	20		9			0.39
T-BUSS	25		12			0.29
	30		15.6			0.23
T-AWS	4-15	0.5	6.5	6.37	1.18	0.78
T-BWS	20		10.2			0.49
T-AUS	25		13.9			0.39
T-BUSS	30		17.5			0.29
	35		20.3			0.26
	40		24			0.22
T-AWS	5-15	0.6	5.6	8.53	1.57	1.27
T-BWS	20		8.9			0.78
T-AUS	25		13.7			0.49
T-BUSS	30		17.3			0.39
	35		23.7			0.29
	40		24.5			0.28
	45		28.4			0.25
	50		32.2			0.22
T-AWS	6-20	0.8	6.7	17.26	3.53	2.06
T-BWS	25		9.3			1.47
T-AUS	30		12.7			1.08
T-BUSS	35		15.6			0.88
	40		18.7			0.69
	45		20.6			0.68
	50		24.5			0.57
	55		28			0.5
	60		29.7			0.47
T-AWS	8-25	1	9.1	24.52	4.9	2.16
T-BWS	30		12.5			1.57
T-AUS	35		15.4			1.27
T-BUSS	40		19.2			0.98
	45		22.2			0.88
	50		25			0.78
	55		28.6			0.7
	60		33.3			0.6
	65		36.3			0.55
	70		40			0.5
T-AWS	10-30	1.2	10.4	30.99	5.49	2.45
T-BWS	35		13.7			1.86
T-AUS	40		17.3			1.47
T-BUSS	45		20			1.27
	50		24.8			0.98
	55		28.2			0.88
	60		31.6			0.78
	65		34.2			0.76
	70		38.8			0.67
	75		43.3			0.6
	80		47.2			0.55
	* 90		52			0.49
	* 100		59			0.43
T-AWS	12-35	1.6	8.5	62.76	14.71	5.69
T-BWS	40		11.8			4.12
T-AUS	45		14.3			3.33
T-BUSS	50		16.8			2.84
	55		19.3			2.45
	60		22.3			2.16
	65		24.5			1.96
	70		27.2			1.77
	75		28.8			1.67
	80		32.7			1.47
	90		36.3			1.35
	100		41			1.2

形式		线径 dmm	动态负载时		初始张力 N (参考值)	弹簧常数 N/mm (参考值)
Type	Do-Lo		最大位移量 δmax.mm	最大负载 N		
T-AWS	14-40	1.8	10.2	74.53	16.67	5.69
T-AUS	45		13.1			4.41
	50		16.4			3.53
	55		19.7			2.94
	60		21.1			2.75
	65		24.6			2.35
	70		27.6			2.06
	75		31.1			1.86
	80		32.8			1.77
	90		37.5			1.6
	100		42.8			1.4
	125		60			1
T-AWS	16-45	2	11.7	86.3	19.61	5.69
T-AUS	50	(T-AWS)	15.1			4.41
	55		17.4			3.82
	60	2.1	21.3			3.14
	65	(T-AUS)	23.4			2.84
	70		26.8			2.45
	75		29.6			2.26
	80		32.7			2.1
	90		37.8			1.77
	100		45.3			1.47
	125		56.7			1.2
	150		71.5			0.95
T-AWS	18-50	2.3	12.5	115.72	27.46	7.06
	55		15			5.88
	60		17.3			5.1
	65		20			4.41
	70		22.5			3.92
	75		25			3.53
	80		29			3.04
	90		33.6			2.65
T-AWS	100	2.6	39.1	150.04	36.28	2.26
	125		53			1.7
	150		64.2			1.4
	20-60		14.7			7.75
	70		20			5.69
	80		25.2			4.51
	90		30.8			3.73
	100		36.1			3.14
T-AWS	125	3.2	48.3	225.55	56.88	2.35
	150		59.5			1.95
	175		72.5			1.6
	24-70		14.7			11.47
	80		20.7			8.14
	90		24.9			6.77
	100		29.7			5.69
	125		41			4.12
T-AWS	150	3.2	50.6			3.4
	175		61.4			2.8
	200		74.7			2.3

※ 初始张力·弹簧常数为参考值。负载(kgf)=负载N×0.101972
* 仅限T-AWS・T-AUS型号