
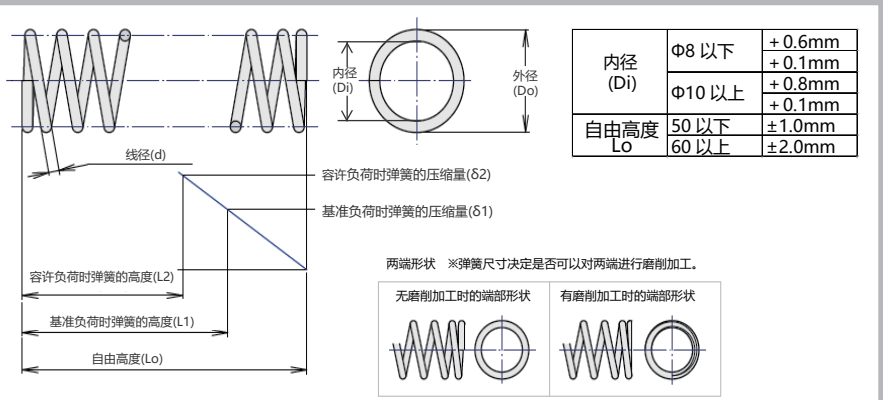


T-VUL

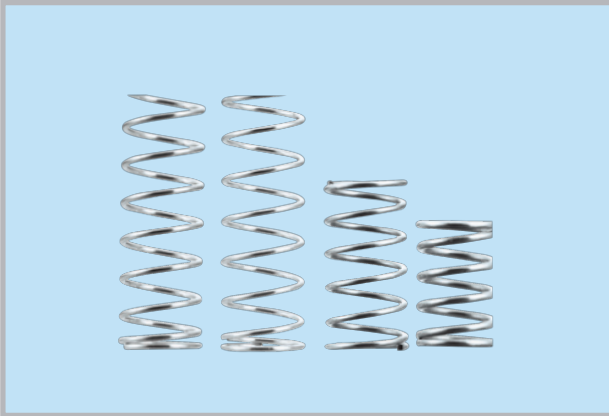

T-VUL: $\delta 2_{\max.} = L_o \times 40\%$ 弹簧常数 0.98N/mm {0.10kgf/mm}

材质: SUS304-WPB 弹簧常数 $\pm 10\%$

型号	外径(Do)	线径	$\delta 2$	N {kgf}	参考		
TypeDi-Lo	(参考 值)	d	max.	max.	Pitch	压紧 高度	总圈数
T-VUL3-	10 *	3.9	0.45	4	3.92 {0.40}	1.2	4.5
	15 *	4	0.5	6	5.88 {0.60}	1.3	6.7
	20 *	4	0.5	8	7.84 {0.80}	1.8	6.7
	25	4.2	0.6	10	9.8 {1.00}	1.2	13.7
	30	4.2	0.6	12	11.76 {1.20}	1.4	13.7
T-VUL4-	10 *	5	0.5	4	3.92 {0.40}	1.7	4
	15 *	5.1	0.55	6	5.88 {0.60}	1.8	5.7
	20	5.2	0.6	8	7.84 {0.80}	1.8	7.8
	25	5.2	0.6	10	9.8 {1.00}	2.3	7.8
	30	5.3	0.65	12	11.76 {1.20}	2.1	10.6
T-VUL5-	10	6.2	0.6	4	3.92 {0.40}	1.7	4.8
	15	6.2	0.6	6	5.88 {0.60}	2.5	4.8
	20	6.2	0.6	8	7.84 {0.80}	3.3	4.8
	25	6.4	0.7	10	9.8 {1.00}	2.3	9.1
	30	6.4	0.7	12	11.76 {1.20}	2.7	9.1
	35	6.4	0.7	14	13.72 {1.40}	3.2	9.1
	40	6.6	0.8	16	15.68 {1.60}	2.2	16
T-VUL6-	45	6.6	0.8	18	17.64 {1.80}	2.5	16
	50	6.6	0.8	20	19.6 {2.00}	2.8	16
	10	7.3	0.65	4	3.92 {0.40}	1.8	5.1
	15	7.4	0.7	6	5.88 {0.60}	2.1	6.3
	20	7.4	0.7	8	7.84 {0.80}	2.9	6.3
	25	7.6	0.8	10	9.8 {1.00}	2.3	10.4
	30	7.6	0.8	12	11.76 {1.20}	2.7	10.4
	35	7.6	0.8	14	13.72 {1.40}	3.2	10.4
	40	7.8	0.9	16	15.68 {1.60}	2.5	16.2
	45	7.8	0.9	18	17.64 {1.80}	2.8	16.2
T-VUL8-	50	7.8	0.9	20	19.6 {2.00}	3.1	16.2
	55	7.8	0.9	22	21.56 {2.20}	3.4	16.2
	60	7.8	0.9	24	23.52 {2.40}	3.8	16.2
	20	9.8	0.9	8	7.84 {0.80}	2.4	9.5
	25	9.8	0.9	10	9.8 {1.00}	2.9	9.5
	30	10	1	12	11.76 {1.20}	2.5	14
	35	10	1	14	13.72 {1.40}	2.9	14
	40	10	1	16	15.68 {1.60}	3.3	14
	45	10	1	18	17.64 {1.80}	3.8	14
	50	10	1	20	19.6 {2.00}	4.2	14
	55	10	1	22	21.56 {2.20}	4.6	14
	60	10.4	1.2	24	23.52 {2.40}	2.7	28.8
	65	10.4	1.2	26	25.48 {2.60}	3	28.8

型号	外径(Do)	线径	$\delta 2$	N {kgf}	参考		
TypeDi-Lo	(参考 值)	d	max.	max.	Pitch	压紧 高度	总圈数
T-VUL10-	20	12	1	8	7.84 {0.80}	3.1	8.5
	25	12	1	10	9.8 {1.00}	3.8	8.5
	30	12.2	1.1	12	11.76 {1.20}	3.2	12.7
	35	12.2	1.1	14	13.72 {1.40}	3.7	12.7
	40	12.2	1.1	16	15.68 {1.60}	4.2	12.7
	45	12.2	1.1	18	17.64 {1.80}	4.7	12.7
	50	12.2	1.1	20	19.6 {2.00}	5.3	12.7
	55	12.6	1.3	22	21.56 {2.20}	3.1	25.4
	60	12.6	1.3	24	23.52 {2.40}	3.4	25.4
	65	12.6	1.3	26	25.48 {2.60}	3.7	25.4
	70	12.6	1.3	28	27.44 {2.80}	4	25.4
	80	12.6	1.3	32	31.36 {3.20}	4.6	25.4
T-VUL12-	25	14.4	1.2	10	9.8 {1.00}	2.9	12.6
	30	14.4	1.2	12	11.76 {1.20}	3.5	12.6
	35	14.4	1.2	14	13.72 {1.40}	4.1	12.6
	40	14.4	1.2	16	15.68 {1.60}	4.7	12.6
	45	14.4	1.2	18	17.64 {1.80}	5.3	12.6
	50	14.4	1.2	20	19.6 {2.00}	5.9	12.6
	55	14.8	1.4	22	21.56 {2.20}	4.1	21.7
	60	14.8	1.4	24	23.52 {2.40}	4.4	21.7
	65	14.8	1.4	26	25.48 {2.60}	4.8	21.7
	70	14.8	1.4	28	27.44 {2.80}	5.2	21.7
T-VUL16-	80	14.8	1.4	32	31.36 {3.20}	5.9	21.7
	90	14.8	1.4	36	35.28 {3.60}	6.7	21.7
	35	19	1.5	14	13.72 {1.40}	4.1	15.8
	40	19	1.5	16	15.68 {1.60}	4.7	15.8
	45	19	1.5	18	17.64 {1.80}	5.3	15.8
	50	19	1.5	20	19.6 {2.00}	5.9	15.8
	55	19.4	1.7	22	21.56 {2.20}	4.4	24.7
	60	19.4	1.7	24	23.52 {2.40}	4.8	24.7
	65	19.4	1.7	26	25.48 {2.60}	5.2	24.7
	70	19.4	1.7	28	27.44 {2.80}	5.6	24.7
	80	19.4	1.7	32	31.36 {3.20}	6.4	24.7
	90	19.4	1.7	36	35.28 {3.60}	7.2	24.7
	100	19.4	1.7	40	39.2 {4.00}	8	24.7

※压紧长度为参考值。因批次不同会有少许差异。
※所有带 * 号的型式两端面未进行磨削加工
※使用次数: 100万次左右