


T-UTT

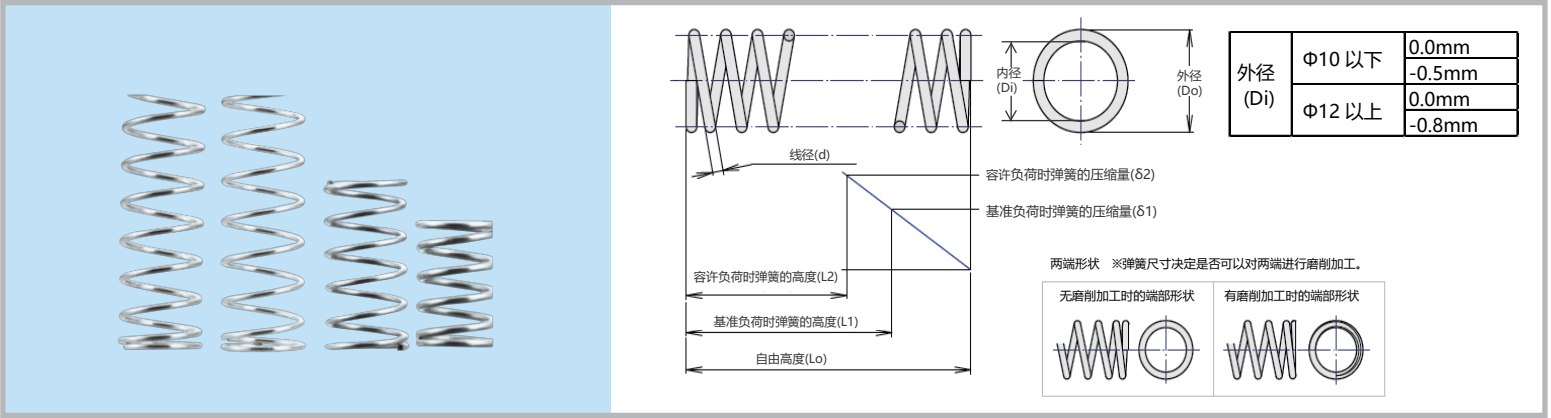

T-UTT: $\delta 2_{max.} = L_o \times (\delta 2)\%$

材质: SUS304-WPB 弹簧常数 ±10%

型号		d	压紧高度 (参考值)	δ2 max.	N {kgf}		(δ2)%
TypeDo-Lo					max.		
T-UTT3-	5 *	0.35	2.8	2	2.9	{0.3}	40
	10 *	0.4	4.8	4	5.9	{0.6}	
	15 *	0.45	8.3	6	8.8	{0.9}	
	20 *	0.45	8.3	6	8.8	{0.9}	30
	25 *	0.5	14	8	11.8	{1.2}	32
	30 *	0.5	14	8	11.8	{1.2}	27
T-UTT4-	5 *	0.4	2.6	2	2.9	{0.3}	40
	10 *	0.45	3.9	4	5.9	{0.6}	
	15 *	0.5	6	6	8.8	{0.9}	
	20 *	0.55	9.4	8	11.8	{1.2}	
	25	0.6	14.4	10	14.7	{1.5}	
	30	0.6	14.4	10	14.7	{1.5}	33
T-UTT5-	5 *	0.45	2.6	2	2.9	{0.3}	40
	10 *	0.5	3.6	4	5.9	{0.6}	
	15	0.6	7.5	6	8.8	{0.9}	
	20	0.6	7.5	8	11.8	{1.2}	
	25	0.65	10.7	10	14.7	{1.5}	
	30	0.7	15.4	12	17.7	{1.8}	
T-UTT6-	35	0.7	15.4	14	20.6	{2.1}	40
	5 *	0.5	2.4	2	3.9	{0.4}	
	10	0.6	4.2	4	7.8	{0.8}	
	15	0.7	7.4	6	11.8	{1.2}	
	20	0.7	7.4	8	15.7	{1.6}	
	25	0.8	13.6	10	19.6	{2.0}	
	30	0.8	13.6	12	23.5	{2.4}	
	35	0.85	17.5	14	27.5	{2.8}	
	40	0.9	23.4	16	31.4	{3.2}	
	45	0.9	23.4	18	35.3	{3.6}	
	50	0.9	23.4	18	35.3	{3.6}	36
T-UTT8-	60	1	41	18	35.3	{3.6}	30
	70	1	41	24	47.1	{4.8}	34
	10	0.75	5.3	4	7.8	{0.8}	40
	15	0.75	5.3	6	11.8	{1.2}	
	20	0.9	10.4	8	15.7	{1.6}	
	25	0.9	10.4	10	19.6	{2.0}	
	30	1	17	12	23.5	{2.4}	
	35	1	17	14	27.5	{2.8}	
	40	1	17	16	31.4	{3.2}	
	45	1.1	25.3	18	35.3	{3.6}	
	50	1.1	25.3	20	39.2	{4.0}	
60	1.1	25.3	24	47.1	{4.8}		
70	1.2	39.6	28	54.9	{5.6}		

型号		d	压紧高度	δ2	N {kgf}		(δ2)%
TypeDo-Lo			(参考值)	max.	max.		
T-UTT10-	10	0.85	5.1	4	7.8	{0.8}	40
	15	0.85	5.1	6	11.8	{1.2}	
	20	1	9.5	8	15.7	{1.6}	
	25	1	9.5	10	19.6	{2.0}	
	30	1.1	14.3	12	23.5	{2.4}	
	35	1.1	14.3	14	27.5	{2.8}	
	40	1.2	20.4	16	31.4	{3.2}	
	45	1.2	20.4	18	35.3	{3.6}	
	50	1.2	20.4	20	39.2	{4.0}	
	60	1.3	29.9	24	47.1	{4.8}	
	70	1.4	43.4	24	47.1	{4.8}	34
T-UTT13-	15	1	5.75	6	11.8	{1.2}	40
	20	1.2	10.5	8	15.7	{1.6}	
	25	1.2	10.5	10	19.6	{2.0}	
	30	1.3	15	12	23.5	{2.4}	
	35	1.3	15	14	27.5	{2.8}	
	40	1.4	20.3	16	31.4	{3.2}	
	45	1.4	20.3	18	35.3	{3.6}	
	50	1.5	27.8	20	39.2	{4.0}	
	60	1.5	27.8	24	47.1	{4.8}	
	70	1.6	38.4	28	54.9	{5.6}	
	80	1.6	38.4	32	62.8	{6.4}	
T-UTT16-	15	1.2	7.2	6	11.8	{1.2}	40
	20	1.3	9.1	8	15.7	{1.6}	
	25	1.3	9.1	10	19.6	{2.0}	
	30	1.4	12.3	12	23.5	{2.4}	
	35	1.5	16.5	14	27.5	{2.8}	
	40	1.6	21.6	16	31.4	{3.2}	
	45	1.6	21.6	18	35.3	{3.6}	
	50	1.7	28	20	39.2	{4.0}	
	60	1.7	28	24	47.1	{4.8}	
	70	1.8	36	28	54.9	{5.6}	
	80	1.8	36	32	62.8	{6.4}	
T-UTT20-	20	1.7	10.6	8	31.4	{3.2}	40
	25	1.8	12.6	10	39.2	{4.0}	
	30	1.8	12.6	12	47.1	{4.8}	
	35	2	19	14	54.9	{5.6}	
	40	2	19	16	62.8	{6.4}	
	45	2	19	18	70.6	{7.2}	
	50	2.2	27.5	20	78.5	{8.0}	
	60	2.2	27.5	24	94.1	{9.6}	
	70	2.3	34.5	28	109.8	{11.2}	
	80	2.4	40.8	32	125.5	{12.8}	

kgf(负载) = N/mm(弹簧常数)×0.101972×δ2(位移量)
{kgf}=N×0.101972
※所有带 * 号的型式两端面未进行磨削加工。
※压紧长度为参考值。因批次不同会有少许差异。
※理论使用次数: 100万次 (非保证值)
※圈数为参考值。因批次不同会有少许差异。
※请务必在容许位移量以内使用。