

YDG type



YDG type

安装方向限定型




RoHS

符合RoHS指令

使用范围

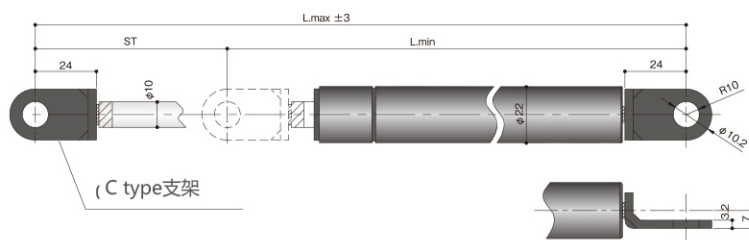


产品编号	型号	气缸直径	最大长度	最小长度	行程	氮气反作用力		杆径	安装孔
			Lmax(mm)	Lmin(mm)		Ft(N)	Fc(N)		
KG011	YDG080245AA	φ22	279	199	80	245	320	10	8.6
KG010	YDG100392AA	φ22	364	264	100	392	510	10	8.6
KG135	YDG100539AA	φ22	317	217	100	539	720	10	8.6
KG008	YDG142275AA	φ22	472	330	142	275	193	10	8.6
KG009	YDG147148AA	φ22	412	265	147	148	358	10	8.6
KG136	YDG182177AA	φ22	462	280	182	177	330	10	8.6
KG137	YDG214418AA	φ22	567	353	214	418	537	10	8.6
KG138	YDG236297AA	φ22	580	344	236	297	395	10	8.6
KG139	YDG236343AA	φ22	580	344	236	343	456	10	8.6
KG007	YDG243432AA	φ22	627	384	243	432	562	10	8.6
KG087	YDG090392CC	φ22	305	215	90	392	506	10	10.2
KG088	YDG200392CC	φ22	525	325	200	392	517	10	10.2
KG089	YDG200496CC	φ22	525	325	200	496	645	10	10.2
KG103	YDG300196CC	φ22	850	550	300	196	327	10	10.2
KG104	YDG300294CC	φ22	850	550	300	294	491	10	10.2
KG140	YDG254311FF	φ22	675	421	254	311	392	10	9



Option

根据客户的要求，可以变更安装部的形状，接受产品的定制需求。

支架

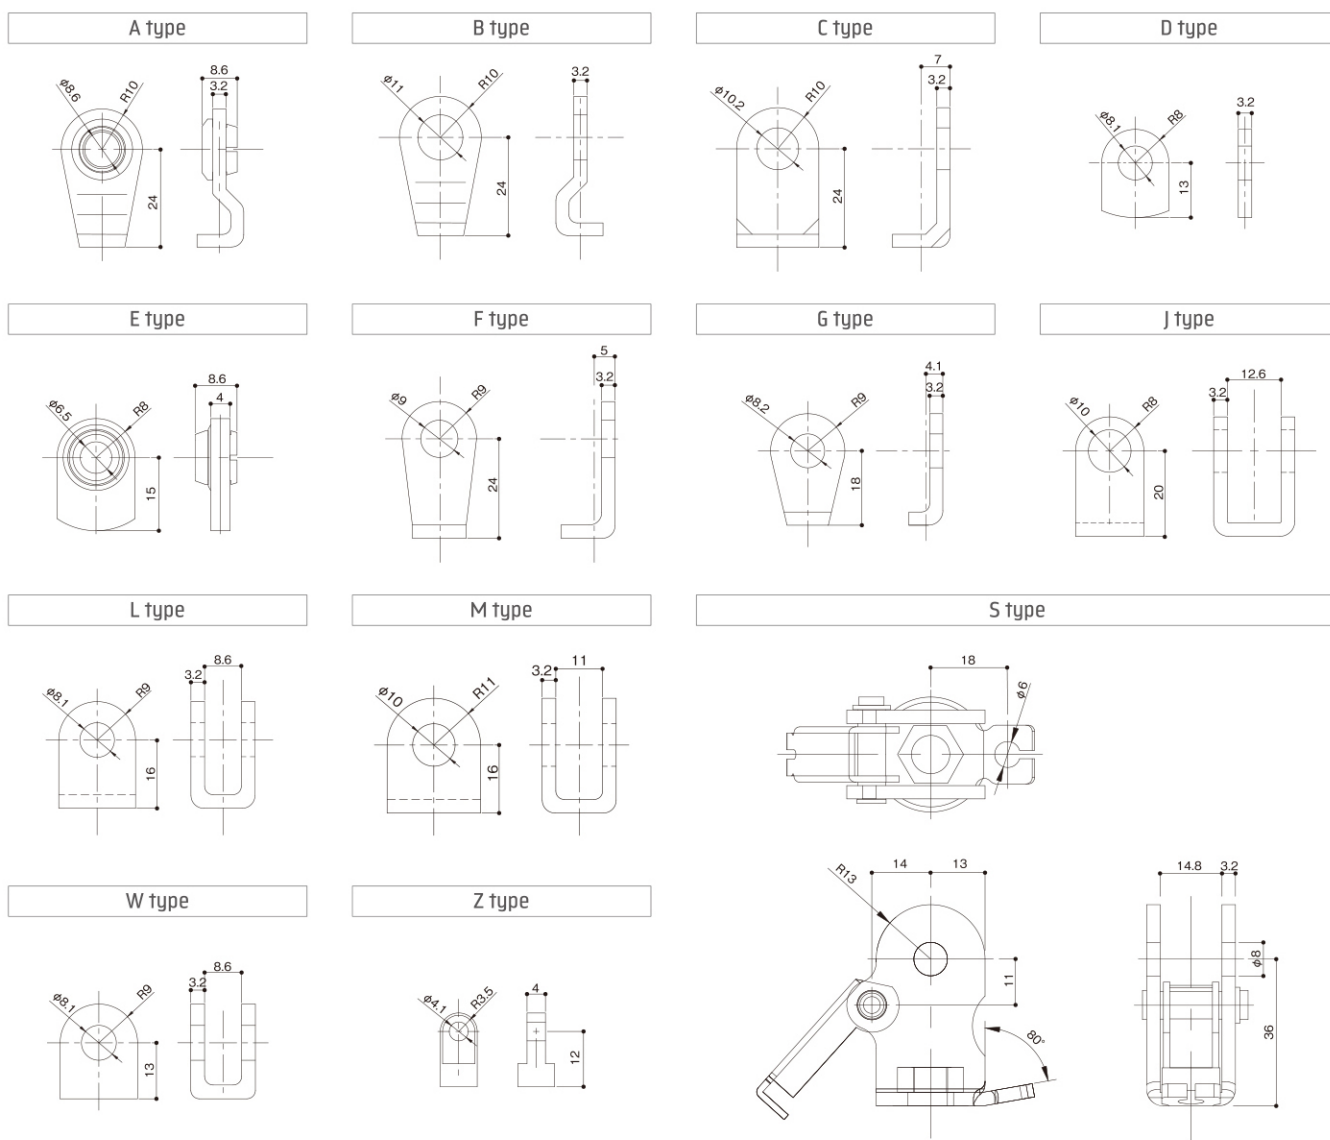

氮气弹簧安装支架

可用于氮气弹簧A type和E type支架的安装Z type支架

